


Polar Shackles G-5163

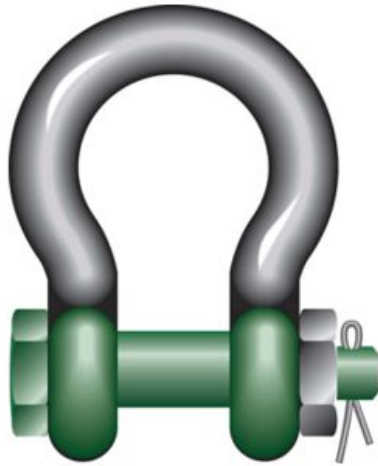

Product information

Bow shackles with safetybolt, for use under extreme climatic conditions.

Standard: EN 13889, ASME B30.26 and meets performance requirements of US Fed. Spec. RR-C-271 Type IVA Class 3, Grade A

Safety factor: 7:1 up to WLL 42,5 ton. 6:1 for 55 and 85 ton.

Material: Bow and pin alloy steel

Marking: According to standard

Temperature range: -40°C up to +200°C

Finish: Hot dip galvanized

Grade: 8

Part Code	WLL ton	width bow g mm	width j mm	diam. bow a mm	diam. pin b mm	diam. eye c mm	Lenght - inside f mm	lenght h mm	lenght bolt i mm	thickness nut k mm	D mm	E mm	Weight kg
11.31POGHMB13	2	32	58	13,5	16	34	51	89	82	13	13	22	0.42
11.31POGHMB16	3.25	43	75	16	19	40	64	110	98	17	16	27	0.74
11.31POGHMB19	4.75	51	89	19	22	46	76	129	114	19	19	31	1.18
11.31POGHMB22	6.5	58	102	22	25	52	83	144	130	22	22	36	1.77
11.31POGHMB25	8.5	68	118	25	28	59	95	164	150	25	25	43	2.58
11.31POGHMB28	9.5	75	131	28	32	66	108	185	166	27	28	47	3.66
11.31POGHMB32	12	83	147	32	35	72	115	201	178	30	32	51	4.91
11.31POGHMB35	13.5	92	162	35	38	80	133	227	197	33	35	57	6.54
11.31POGHMB38	17	99	175	38	42	88	146	249	202	19	38	60	8.19
11.31POGHMB45	25	126	216	45	50	103	178	300	249	23	45	74	14.22
11.31POGHMB50	35	138	238	50	57	116	197	334	269	26	50	83	19.85
11.31POGHMB57	42.5	160	274	57	65	130	222	377	301	29	57	95	28.33
11.31POGHMB65	55	180	310	65	70	145	260	433	330	32	65	105	39.59
11.31POGHMB75	85	190	340	75	83	162	329	527	380	39	73	127	62

Blueprint

