

Smart Hoist 22

Product information



Features:

- extremely low construction height, only 150 mm
- extremely light, only 10.5 kg
- simple and easy assembly for one person
- specially adapted bag as an accessory, easy to carry
- easily adjustable for most beams
- powder coated sides and covers in aluminum
- spark-free, fiberglass-reinforced and ball-bearing plastic wheels

According to the Machinery Directive 2006/42/EC

[... Read more](#)

Material: Aluminium

Marking: According to standard, CE-marked


Temperature range: -10°C up to +50°C

Standard: EN 13157

Safety factor: 4:1

Smart Hoist 22

Blueprint

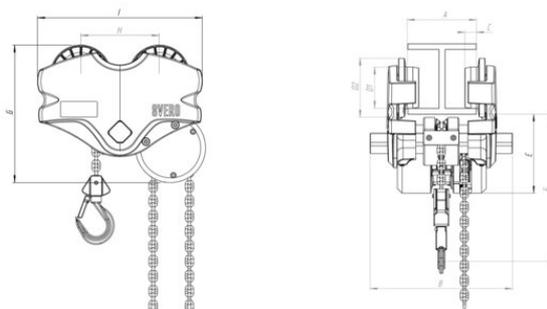

Technical data

Part code	WLL ton	Lifting height m	A mm	B mm	C mm	D1 mm	D2mm mm	E mm	F mm	G, mm	H, mm	I mm mm	Weight kg
500500050300580	0.5	3	120-180	240	24	100	70	132	150	231	130	282	10.5