
Lifting Solutions Group
Axel Johnson International

Spiral Rope PVC-coated 1X19 Stainless

Product information

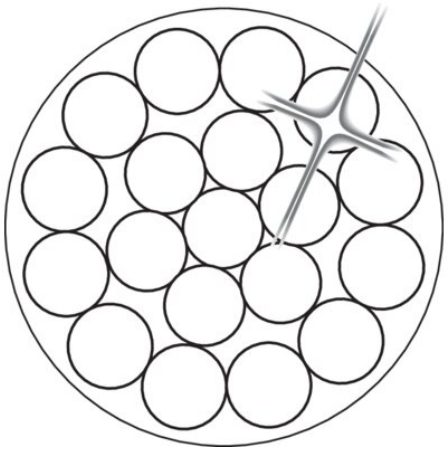

General use

A stainless spiral rope with a white PVC-coating. It can be used for various applications such as signaling devices, etc but not for lifting.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... *Read more*

Rope construction: Spiral rope 1x19
Material: AISI 316 / EN 1.4401
Marking: According to standard
Temperature range: -30°C up to +70°C
Finish: PVC-coated, see table for colour
Standard: EN 12385-10
except material and coating

Fill factor: 0,74

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Spiral Rope PVC-coated 1X19 Stainless

Technical data

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm²	Min. breaking force kN	Steel area mm²	Weight kg/100m
105120050030051	5	3	White	1,570	7.43	5.25	5.1
105120600400051	6	4	White	1,570	13.2	9.34	9.1
105120800400051	8	4	White	1,570	13.2	9.34	9.9
105120800500051	8	5	White	1,570	20.6	14.6	14

© November 2026 - All Rights Reserved