


## Spiral Rope PVC-coated 1X19 Stainless

### Product information

Z SS

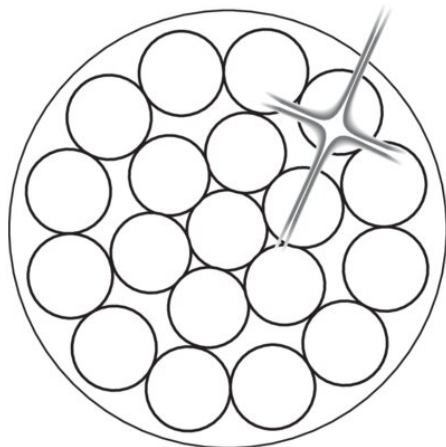

A stainless spiral rope with a white PVC-coating. It can be used for various applications such as signaling devices, etc but not for lifting.

The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... [Read more](#)

**Rope construction:** Spiral rope 1x19

**Material:** AISI 316 / EN 1.4401

**Marking:** According to standard

**Temperature range:** -30°C up to +70°C

**Finish:** PVC-coated, see table for colour

**Standard:** EN 12385-10

*except material and coating*

**Fill factor:** 0,74

General use



## Spiral Rope PVC-coated 1X19 Stainless

### Technical data

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm <sup>2</sup>	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
105120050030051	5	3	White	1,570	7.43	5.25	-	5.1
105120600400051	6	4	White	1,570	13.2	9.34	-	9.1
105120800400051	8	4	White	1,570	13.2	9.34	-	9.9
105120800500051	8	5	White	1,570	20.6	14.6	-	14