


## Lifting Beam Type K

### Product information

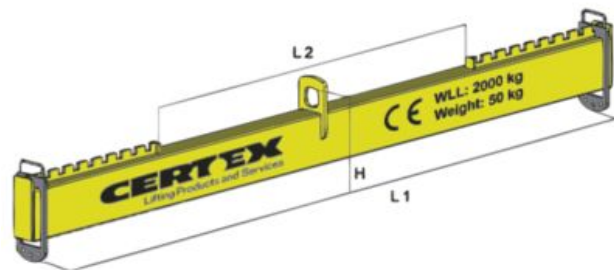

This type of lifting beam is characterized by adjustable attachments via a cam beam and it is designed for direct attachment to the crane hook in the central lifting eye. The attachment points are designed as oval rings, which makes it possible to use for example a 2-part sling. Other lengths and working loads can be manufactured upon request.

**Design:** Lightweight welded pipe beam construction providing good torsional stiffness.

**Proof load:** Usually 1,5 x WLL.

**Material:** Hollow beam and plate manufactured with high-strength structural steel.

**Marking:** Working load limit (WLL), CE marking, manufacturer, serial number, year of manufacturing, etc.

**Finish:** Yellow painted. Other treatments available on request.

**Note:** Top sling, separate slings and other accessories to be ordered separately.

**Safety factor:** 1,5 x WLL

Part Code	Code	WLL ton	L1 mm	L2 mm	H mm	Weight kg
13.3562-0051500	K-0,5/1,5	0.5	1,500	750	250	28
13.3562-0052000	K-0,5/2	0.5	2,000	800	250	34
13.3562-0052500	K-0,5/2,5	0.5	2,500	1,300	250	38
13.3562-0053000	K-0,5/3	0.5	3,000	1,350	250	58
13.3562-0053500	K-0,5/3,5	0.5	3,500	1,850	280	72
13.3562-0054000	K-0,5/4	0.5	4,000	1,900	280	81
13.3562-0055000	K-0,5/5	0.5	5,000	2,450	280	139
13.3562-0056000	K-0,5/6	0.5	6,000	3,000	330	172

13.3562-0101500	K-1/1,5	1	1,500	750	280	32
13.3562-0102000	K-1/2	1	2,000	800	280	48
13.3562-0102500	K-1/2,5	1	2,500	1,300	280	56
13.3562-0103000	K-1/3	1	3,000	1,350	280	65
13.3562-0103500	K-1/3,5	1	3,500	1,850	280	101
13.3562-0104000	K-1/4	1	4,000	1,900	330	146
13.3562-0106000	K-1/6	1	6,000	3,000	415	169
13.3562-0105000	K-1/5	1	5,000	2,450	330	177
13.3562-0201500	K-2/1,5	2	1,500	750	330	48
13.3562-0202000	K-2/2	2	2,000	800	330	56
13.3562-0202500	K-2/2,5	2	2,500	1,300	330	74
13.3562-0203000	K-2/3	2	3,000	1,350	330	98
13.3562-0203500	K-2/3,5	2	3,500	1,850	330	132
13.3562-0204000	K-2/4	2	4,000	1,900	415	135
13.3562-0205000	K-2/5	2	5,000	2,450	415	207
13.3562-0206000	K-2/6	2	6,000	3,000	415	253
13.3562-0302000	K-3/2	3	2,000	800	415	74
13.3562-0303000	K-3/3	3	3,000	1,350	415	115
13.3562-0304000	K-3/4	3	4,000	1,900	415	174
13.3562-0305000	K-3/5	3	5,000	2,450	455	246
13.3562-0306000	K-3/6	3	6,000	3,000	595	408
13.3562-0502000	K-5/2	5	2,000	800	455	106
13.3562-0503000	K-5/3	5	3,000	1,350	455	165

13.3562-0504000	K-5/4	5	4,000	1,900	455	245
13.3562-0505000	K-5/5	5	5,000	2,450	595	258
13.3562-0506000	K-5/6	5	6,000	3,000	595	409
13.3562-0802000	K-8/2	8	2,000	800	455	123
13.3562-0803000	K-8/3	8	3,000	1,350	595	250
13.3562-0804000	K-8/4	8	4,000	1,900	595	352
13.3562-0805000	K-8/5	8	5,000	2,450	595	495
13.3562-0806000	K-8/6	8	6,000	3,000	760	600
13.3562-1002000	K-10/2	10	2,000	800	595	266
13.3562-1003000	K-10/3	10	3,000	1,350	595	330
13.3562-1004000	K-10/4	10	4,000	1,900	595	383
13.3562-1005000	K-10/5	10	5,000	2,450	760	522
13.3562-1006000	K-10/6	10	6,000	3,000	760	704
13.3562-1604000	K-16/4	16	4,000	1,900	760	517
13.3562-1605000	K-16/5	16	5,000	2,450	825	741
13.3562-1606000	K-16/6	16	6,000	3,000	825	850