



## Trulift 8S

### Product information

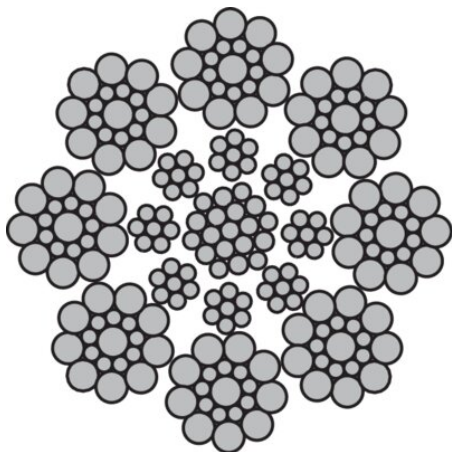

Elevator



Higher strength  
Lower stretch  
Uniform diameter  
Good diameter retention  
Improved fatigue performance

**Tolerance** more than 10 mm: 0% - +5%

**Tolerance** less than 10 mm: 0% - +6%

... [Read more](#)

**Features:** High quality steel core lift rope

**Material:** High Carbon Steel

**Marking:** According to standard, On Termination ID and CE mark

**Finish:** Ungalvanised

**Standard:** EN 12385-5

**Fill factor:** 0.59

## Trulift 8S

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
106100904020089	9	1,570	Bright	sZ	48	38.1	SupplierStandard	34
106101004020089	10	1,570	Bright	sZ	58.5	46.6	SupplierStandard	41
106101104020089	11	1,570	Bright	sZ	69.7	55.6	SupplierStandard	49
106101204020089	12	1,570	Bright	sZ	83.6	66.4	SupplierStandard	59
106101304020089	13	1,570	Bright	sZ	100	79.5	SupplierStandard	70
106101404020089	14	1,570	Bright	sZ	116	91.8	SupplierStandard	81
106101504020089	15	1,570	Bright	sZ	131	104	SupplierStandard	92
106101604020089	16	1,570	Bright	sZ	148	118	SupplierStandard	105