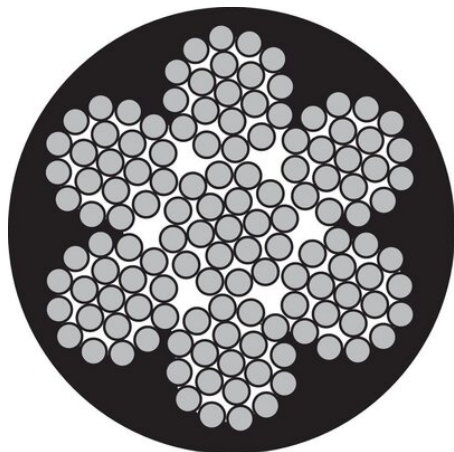


Spiral Rope PVC-coated 1x19

Product information

G

A galvanized spiral rope with a white PVC-coating. It can be used for various applications such as signaling devices, etc but not for lifting.


The PVC-coating is UV stabilized which makes it suitable for longterm outdoor use and it is fully compliant with REACH Directive 1907/2006.

... [Read more](#)

Rope construction: Spiral rope 1x19
Marking: According to standard
Temperature range: -30°C up to +70°C
Finish: PVC-coated (white)
Standard: EN 12385-10
except from coating

Fill factor: 0,74

General use



Spiral Rope PVC-coated 1x19

Technical data

Part code	Rope diameter mm	Inner diameter mm	Colour	Tensile strength N/mm ²	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
105130120090251	1.2	0.9	White	1,770	0.75	0.47	-	0.5
105140120090251	1.2	0.9	White	1,960	0.84	0.47	-	0.5