


## Steel Wire Rope 6x19S-IWRC

### Product information

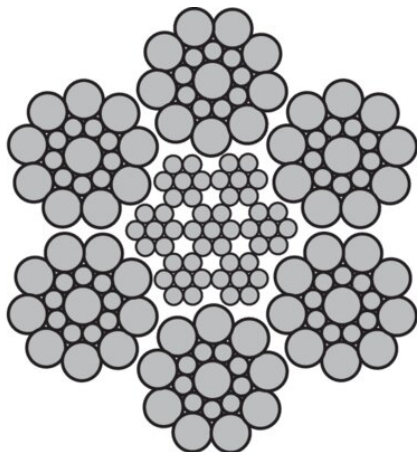

**Typical applications:** Skidding winches.

**Standard:** EN 12385-4.

**Design:** Ordinary right hand lay.

**Fill factor:** 0,57

**ISO 4309 Rope Category No:** All Diameters RCN.02

... [Read more](#)

**Rope construction:** 6x19S-IWRC

**Marking:** According to standard

**Finish:** Galvanized.

**Standard:** EN 12385-4

**Fill factor:** 0.57

**RCN:** 02

## Steel Wire Rope 6x19S-IWRC

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
101100504270229	5	1,960	Galvanized	sZ	17.4	11.2	SupplierStandard	10
101100604270229	6	1,960	Galvanized	sZ	25.1	16.2	SupplierStandard	14.4
101100804270229	8	1,960	Galvanized	sZ	44.7	28.7	SupplierStandard	25.6
101101004270229	10	1,960	Galvanized	sZ	69.8	44.9	SupplierStandard	40
101101204270229	12	1,960	Galvanized	sZ	100	64.7	SupplierStandard	57.6
101101404270229	14	1,960	Galvanized	sZ	137	88	SupplierStandard	78.4