


Lubricant Brilube 30

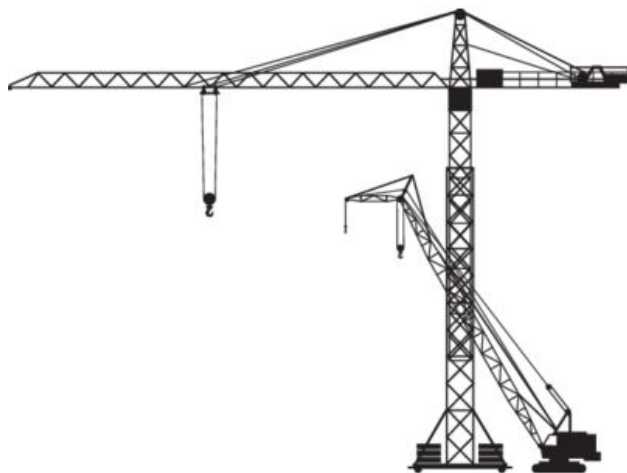

Product information

BRIDON

Typical applications: Tower Cranes, mobile cranes, dockside cranes and fishing ropes.

General: A semi-dry thin film lubricant with excellent penetration and corrosion resisting properties. Formulated for frequent use in harsh working conditions, whilst minimising lubricant build-up and abrasive particle contamination.

Minimum application temperature: -5°C.

Application method: Dipping, brushing or spraying.

Temperature range: -30°C up to +60°C

Part Code	Packing
10.50LUBE30	Spray 1 can
10.50LUBE31	Spray 1 package (12 Cans)
10.50LUBE32	Can 5 l (4 Cans)
10.50LUBE33	Can 20 l
10.50LUBE34	Barrel 205 l