


## Chain Sling CSX-275 Grade 10

---

### Product information

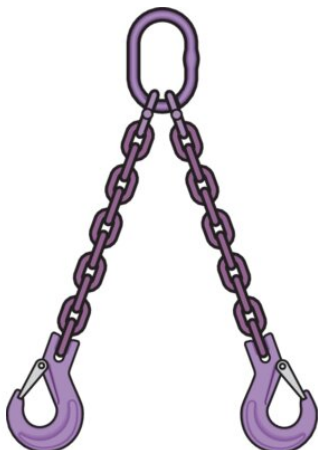

**Design:** Chain sling with master link on one end and clevis load hook on the other end of each leg.

∅ 26 mm chain is fitted with eye hooks. Other combinations possible on demand.

**Dimensions:** ∅ 6–26 mm (other dimensions on demand).

[... Read more](#)

**Material:** Alloy steel.

**Marking:** According to standard, CE-marked

**Temperature range:** -40°C up to 200°C (up to 380° possible on demand)

**Standard:** EN 818-4

**Warning:** Not to be heat-treated.

**Safety factor:** 4:1

**Grade:** 10

## Chain Sling CSX-275 Grade 10

### Technical data

Part code	Chain diameter mm	WLL ton
240800600000050	6	2
240800700000050	7	2.65
240800800000050	8	3.55
240801000000050	10	5.6
240801300000050	13	9.5
240801600000050	16	14
240801900000050	19	20
240802200000050	22	26.5