


Cable Laid Grommet

Product information

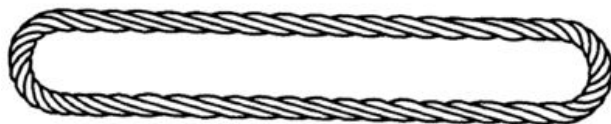

Cable laid grommets can be used in all types of lifting operations. They come in different lengths and designs. This design gives great flexibility.

Cablelaid grommets: 7(6x36WS-IWRC)

Breaking load: 1960 N/mm².

Marking: According to standard

Finish: Galvanized

Standard: EN 13414-3

Part Code	WLL ton
10.73RHEG7636S009G.XXX	1.38
10.73RHEG7636S012G.XXX	2.46
10.73RHEG7636S015G.XXX	3.84
10.73RHEG7636S018G.XXX	5.53
10.73RHEG7636S021G.XXX	7.53
10.73RHEG7636S024G.XXX	9.83
10.73RHEG7636S027G.XXX	12.4
10.73RHEG7636S030G.XXX	15.4

10.73RHEG7636S033G.XXX	18.6
10.73RHEG7636S036G.XXX	22.1
10.73RHEG7636S039G.XXX	26
10.73RHEG7636S042G.XXX	30.1
10.73RHEG7636S045G.XXX	35
10.73RHEG7636S048G.XXX	39.3
10.73RHEG7636S054G.XXX	49.8
10.73RHEG7636S057G.XXX	55.5
10.73RHEG7636S060G.XXX	61.3
10.73RHEG7636S066G.XXX	76.2
10.73RHEG7636S072G.XXX	93.2
10.73RHEG7636S078G.XXX	112.5
10.73RHEG7636S084G.XXX	134
10.73RHEG7636S090G.XXX	159
10.73RHEG7636S096G.XXX	186.5
10.73RHEG7636S102G.XXX	217
10.73RHEG7636S108G.XXX	252
10.73RHEG7636S114G.XXX	290
10.73RHEG7636S120G.XXX	333
10.73RHEG7636S126G.XXX	381
10.73RHEG7636S132G.XXX	434
10.73RHEG7636S138G.XXX	493
10.73RHEG7636S144G.XXX	560

10.73RHEG7636S150G.XXX

634

10.73RHEG7636S156G.XXX

692

10.73RHEG7636S168G.XXX

803

10.73RHEG7636S174G.XXX

861

10.73RHEG7636S192G.XXX

1,049

10.73RHEG7636S204G.XXX

1,184