
Lifting Solutions Group
Axel Johnson International

Master Link Assembly Pewag VWI Stainless

Product information

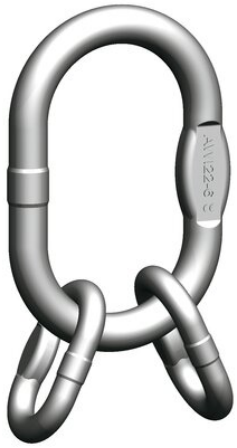

Stainless steel master link for 3- and 4-leg chainslings.

This stainless steel chain sling is electrically welded for a clean finish, stamped and ideally suited for assembling III- and IV-leg chain slings in welded or assembled systems. The dimensions are similar to DIN 5688-1.

The VWI Master link assembly is tested at 100 % of its load capacity. It is made from high-grade stainless steel with a higher resistance to acids and caustics than the standard four-leg chain slings G8, G10 and G12.

It is ideally suited for use in water and wastewater applications and can also be used in connection with chemicals and food products; however, restrictions will apply.

... *Read more*

Material: 1.4404 (AISI 316L), 1.4462 (AISI 318LN).
Marking: CE-mark
Finish: Pickled and blasted.


Safety factor: 4:1
Grade: 6

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Master Link Assembly Pewag VWI Stainless

Blueprint



Technical data

Part code	Code	WLL ton	Consisting of	Usable up to sling hooks following DIN 15401 No.	d mm	d1 mm	e mm	t mm	t1 mm mm	w mm mm	w1mm mm	Weight kg
400100080070	VWI 4-6	0.84	AWI 10-6 + 2 BWI 9-6	1.6	10	9	124	80	44	50	20	0.28
400100130070	VWI 5-6	1.3	AWI 13-6 + 2 BWI 10-6	2.5	13	10	154	110	44	60	20	0.52
400100260070	VWI 6/7-6	2.6	AWI 16-6 + 2 BWI 13-6	2.5	16	13	164	110	54	60	25	0.91
400100340070	VWI 8-6	3.35	AWI 18-6 + 2 BWI 16-6	5	18	16	205	135	70	75	34	1.64
400100530070	VWI 10-6	5.25	AWI 22-6 + 2 BWI 20-6	6	23	20	245	160	85	90	40	3.02
400100890070	VWI 13-6	8.9	AWI 26-6 + 2 BWI 22-6	8	27	23	295	180	115	100	50	4.78
400101320070	VWI 16-6	13.2	AWI 32-6 + 2 BWI 26-6	10	32	27	340	200	140	110	65	7.98

© November 2026 - All Rights Reserved