

## Winner 200 Chain Pewag


---

### Product information

Round steel chains for use in lifting or lashing chains.

... [Read more](#)

---

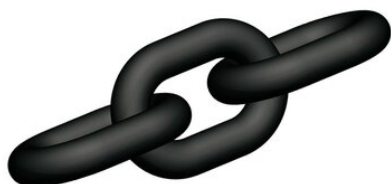

**Material:** High duty chain.

**Marking:** According to standard, Each chain link is marked with 10 for grade 10 and the chain is marked pewag 10 (PWA 100).

**Temperature range:** -40°C up to +200°C.

**Finish:** Blasted, clear painted.


**Standard:** EN 818-2

**Safety factor:** 4:1

**Grade:** 10

## Winner 200 Chain Pewag

### Blueprint



### Technical data

Part code	Chain diameter mm	WLL ton	Min. breaking force kN	dn mm	t mm	b1 mm	b2 mm	Weight kg/m
203500500000080	5	1	39.3	5	16	7.5	18.5	0.61
203500600000080	6	1.4	56.5	6	18	8.7	21.6	0.96
203500700000080	7	1.9	77	7	21	9.5	25.2	1.2
203500800000080	8	2.5	101	8	24	10.9	28.8	1.57
203501000000080	10	4	157	10	30	13.5	37	2.46
203501300000080	13	6.7	265	13	39	17.5	46.8	4.18
203501600000080	16	10	402	16	48	21.5	57.6	6.28
203501900000080	19	14	567	19	57	26.6	69.4	8.92
203502200000080	22	19	760	22	66	29.5	79.2	11.88
203502600000080	26	26.5	1,006	26	78	35	94	16.18
203503200000080	32	40	1,610	32	96	43.2	115	24.1