


Steel wire rope - 6xK36WS-IWRC Compacted



Product information

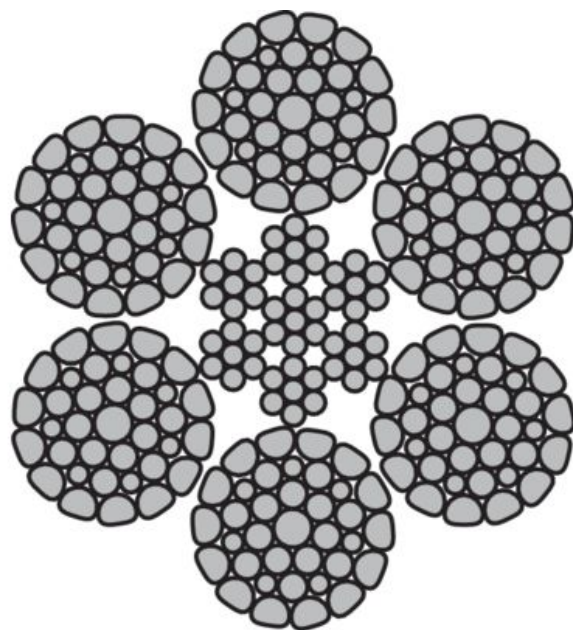

ISO 4309 Rope Category No: 10-40mm RCN.09

Rope construction: 6xK36WS-IWRC

Marking: According to standard

Standard: EN 12385-4

Fill factor: 0.68

Winch rope



Tower crane



Container crane



Mobile port crane



Offshore crane



Loading crane




Crawler crane



Piling crane



Overhead cranes



Part Code	Rope diameter mm	Steel Area mm²	Min. breaking force kN 1960 N/mm²	Min. breaking force kN 2160 N/mm²	Weight kg/100m
01.B12265100G	10	50.3	84.2	89.6	45
01.B12265120G	12	72.5	118	126	65
01.B12265130G	13	85	138	147	76
01.B12265140G	14	96.6	169	179	89
01.B12265160G	16	129	210	224	116
01.G22265180G	18	163	266	283	147
01.B12265190G	19	182	299	319	164
01.B12265200G	20	201	328	349	182
01.B12265220G	22	244	397	424	220
01.B12265240G	24	290	473	504	262
01.G22265250G	25	315	513	547	284
01.G12265260G	26	340	555	592	307
01.B12265280G	28	395	643	686	356
01.B12265300G	30	453	739	788	409
01.B12265320G	32	515	840	897	465
01.G22265340G	34	582	949	1010	525
01.G12265350G	35	616	1010	1069	557
01.B12265360G	36	652	1069	1138	589
01.B12265380G	38	727	1187	1265	656
01.B12265400G	40	805	1314	1402	727