


## Fork Lift Basket TK-503 / TK-504 / TK-505



### Product information

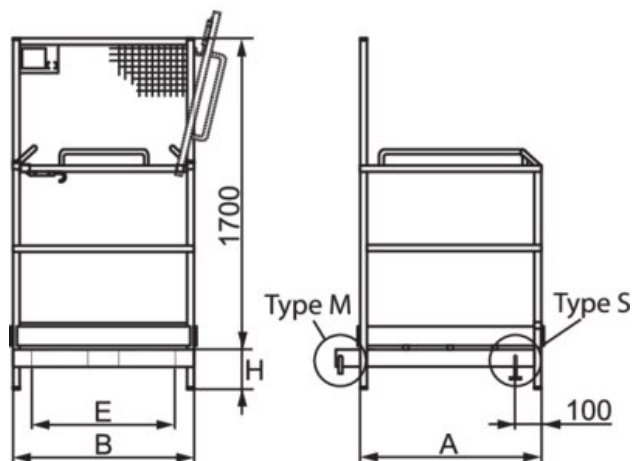

**General:** Instead of ladders and scaffolding, fork lift baskets are often a better solution for temporary jobs. Our range of standard baskets are suitable for the majority of fork lifts on the market. Only work of a temporary nature, such as maintenance, inspection and survey work, may be carried out.

**Design:** Load-bearing welded hollow-beam construction with scuff plate, and nonslip flooring of expanded metal. The basket has a protective grille on the truck frame, tubular handrails, a lockable boom, and a locking device for the counterbalance option as well as fork lifts with stabilizer legs. The choice of basket has to take into account the type of truck, the lifting capacity, and the width.

**TK-503:** Designed for counterbalanced fork lifts — no legs.

**TK-504:** Designed for counterbalanced fork lifts — with legs.

**TK-505:** Designed for fork lifts with stabilizers — with legs.

**Proof:** Function tested.

**Material:** Hollow-beam and plate of high-strength structural steel.

**Marking:** Sign according to standard SS 3628.

**Finish:** Yellow painted.

**Note:** Before use basket and fork lift has to be initially inspected together.

| Part code | Code   | WLL ton | Basket weight kg | Door type | Locking device* | Fork tubes mm | Max. number of persons | A mm  | B mm  | E mm | H mm | Weight kg |
|-----------|--------|---------|------------------|-----------|-----------------|---------------|------------------------|-------|-------|------|------|-----------|
| 6225TK503 | TK-503 | 0.215   | 85               | Boom      | M               | 155x60        | 1                      | 1,000 | 1,000 | 894  | 70   | 300       |
| 6225TK504 | TK-504 | 0.3     | 100              | Boom      | M               | 220x100       | 2                      | 1,200 | 800   | 594  | 240  | 400       |
| 6225TK505 | TK-505 | 0.3     | 100              | Boom      | S               | 220x100       | 2                      | 1,200 | 800   | 594  | 240  | 400       |

Blueprint

